


Pinkview-AT Digital Mammography

The advantages of BEMEMS mammography

- Adapted the high quality X-ray tube of Varex from USA.
- High frequency inverter type
- C-arm All motorized movement system
- Simple software easy to use

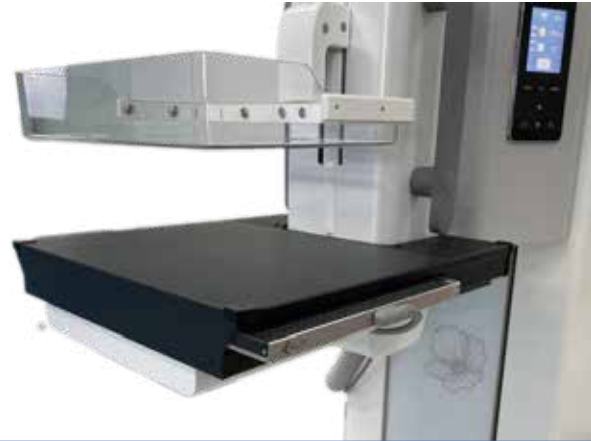

BEMEMS Pinkview-AT

- Fully motorized Auto Standard Positioning mammography system

| | |
|--------------|--|
| Generator | High Frequency Inverter Type Max mA current : 100mA@25kV |
| X-ray Tube | Target Material : Mo (Rotating) Heat Capacity : 300,000 HU Focal Spot : 0.1 / 0.3 mm Add. Filtration : 0.03 mm Mo |
| Bucky Size | 24 x 30 cm |
| AEC Position | 4 positions |
| AEC Mode | AEC, Auto mAs, Manual 15 Density Adjustment steps |

DRTECH RSM2430C

- Digital mammography upgrade solution
- Proven and used in over 40 countries worldwide

| | |
|---------------------------|---|
| Pixel size | 76 um |
| Active Area | 291.8 x 233.5 mm |
| Resolution | 3,072 x 3,840 |
| Interface | Giga Ethernet |
| Software | RConsole1 |
| PC spec. (recommended) | CPU : Intel i5 RAM : 8GB HDD : 1TB OS : Windows 10 |





Pinkview-AT

SIEMENS